


Model IQ 91

Stylish Hotel guest room phone with Handsfree

Feature List

- Handsfree speaker with volume control and mute key
- Built-in message waiting indicator lamp
- Built-in Data Port with two switchable modes for PC's (see below for further information)
- Hotel Logo and service information printing
- Ringer volume control
- Hearing Aid compatible
- 'Tropicguard' for humid conditions

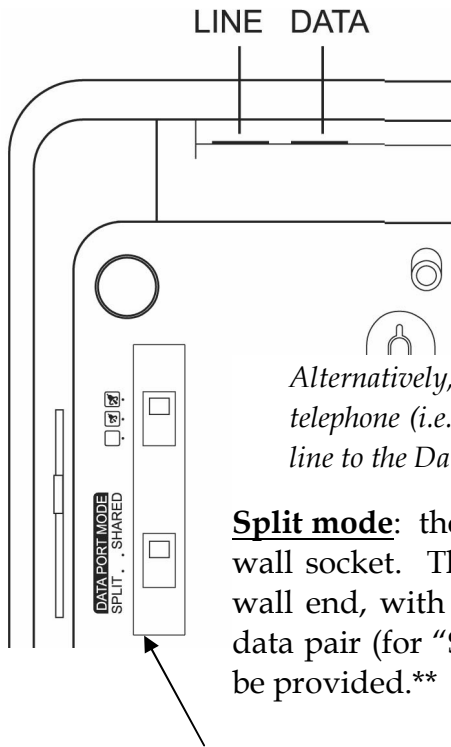

Shared mode; uses one analog telephone line and provides the user with access to a Data Port, but in this mode the telephone's voice capability is disabled while the Data Port is in use. The IQ 91 line cord (as supplied) is terminated with RJ45 at the wall end. For Shared mode the telephone line should be terminated on pins 4 and 5 of the wall socket. Different plug or cord types can be provided.**

Alternatively, to enable the user to simultaneously access both the Data Port and the telephone (i.e. "Split" mode) the IQ 91 can achieve this by dedicating a second analog line to the Data Port, and setting the Data Port Mode Switch to Split mode.*

Split mode: the dedicated analog data pair must be connected to the telephone wall socket. The IQ 91 line cord (as supplied) is terminated with RJ45 at the wall end, with the voice pair in the middle (pins 4 and 5) and the dedicated data pair (for "Split" mode) on pins 3 and 6.* Different plug or cord types can be provided.**

**May be at extra cost.

The Data Port Mode Switch is found on the underside of the telephone.

Specifications of Interquartz IQ 91	
Dial mode:	Tone/DTMF
PBX Recall (Labelled as "Call Waiting"):	100 milliseconds Timed Break
Ringer Lamp/Message Waiting Lamp:	Neon tube, LED, or other depending on option fitted – consult for details of options
Power Source:	Line powered. Batteries are NOT required
Redial function/ Pause function:	31 digits/3.6 Seconds
Dimensions:	Width : 160mm; Height : 83mm; Length : 231mm
Ringer:	Electronic, with Hi/Lo/Off settings; 80dBA at 1 Ft
Line cord and Plug:	2M flat modular with short body RJ45 at the wall end, requires RJ45 female at the wall*
Wall mount kit:	Order Wall Mount Kit No.3
Operating Temp and Humidity:	Temperature : 0°C - 40°C; Humidity : 95% RH max, No dew forming
Regulatory Compliance:	Complies with current ACA/Austel standards
Colour:	Standard Satin Black - ABS plastic (other colours may be available on request)

